

Office of Health Compliance Assistance

**Subject: 29 CFR 1926.62, Lead Exposure In Construction; Interim Final Rule--Inspection and Compliance Procedures**

**\*\*NOTE: As a result of the March 26, 2012, revision to OSHA's Hazard Communication Standard, minor changes {in brackets} were made to this directive on November 1, 2015. These changes do not impact this directive's enforcement policy.**

- A. **Purpose.** This instruction provides uniform inspection and compliance guidance for Lead Exposure in Construction, 29 CFR 1926.62, Interim Final Rule, published in the Federal Register May 4, 1993, that became effective June 3, 1993.
- B. **Scope.** This instruction applies OSHA-wide.
- C. **References.**
1. OSHA Instruction STP 2.22A, Changes to the State Plan Policies and Procedures Manual.
  2. OSHA Instruction ADM 1-1.12B, December 29, 1989, the Integrated Management Information System (IMIS) Forms Manual.
  3. OSHA Instruction CPL 2-2.30, November 14, 1980, 29 CFR 1913.10(b)(6), Authorization of Review of Medical Opinions
  4. OSHA Instruction CPL 2-2.32, January 19, 1981, 29 CFR 1913.10(b)(6), Authorization of Review of Specific Medical Information.
  5. OSHA Instruction CPL 2-2.33, February 8, 1982, 29 CFR 1913.10, Rules of Agency Practice and Procedure Concerning OSHA Access to Employee Medical Records--Procedures Governing Enforcement Activities.
  6. OSHA Instruction CPL 2.45B, June 15, 1989, the Revised Field Operations Manual (FOM).
  7. OSHA Instruction CPL 2-2.43A, July 1, 1991, Chemical Information Manual.
  8. OSHA Instruction CPL 2-2.20B CH-2, April 19, 1993, OSHA Technical Manual.
- D. **Action.** OSHA Regional Administrators and Area Directors shall use the guidelines in this instruction to ensure uniform enforcement of the Interim Final Rule for Lead Exposure in Construction, 29 CFR 1926.62. The Directorate

of Compliance Programs will provide support as necessary to assist the Regional Administrators and Area Directors.

E. **Federal Program Change.** This instruction describes a Federal program change which affects State programs. Each Regional Administrator shall:

1. Ensure that a copy of this change is promptly forwarded to each State designee, using a format consistent with the Plan Change-Two-way Memorandum in Appendix P, OSHA Instruction STP 2.22A, CH-2.
2. Explain the technical content of this change to the State designees as requested.
3. Ensure that State designees are asked to acknowledge receipt of this Federal program change in writing to the Regional Administrator as soon as the State's intention is known, but not later than 70 calendar days after the date of issuance (10 days for mailing and 60 days for response). This acknowledgment must include a description either of the State's plan to implement the change or of the reasons why this change should not apply to that State.
4. Ensure that the State designees submit a plan supplement, in accordance with OSHA Instruction STP 2.22A, CH-3, as appropriate, following the established schedule that is agreed upon by the State and Regional Administrator to submit non-Field Operations Manual/OSHA Technical Manual Federal program changes.
  - a. If a State intends to follow OSHA's policy described in this instruction, the State must submit either a revised version of this instruction, adapted as appropriate to reference State law, regulations and administrative structure, or a cover sheet describing how references in this instruction correspond to the State's structure. The State's acknowledgment of the Plan Change Two-way Memorandum may fulfill the plan supplement requirement if the appropriate documentation is provided.
  - b. If the State adopts an alternative to Federal guidelines, the State's submission must identify and provide a rationale for all substantial

differences from Federal guidelines to allow OSHA to judge whether a different State procedure is as effective as comparable Federal guidelines.

5. Advise the State designees that they may consult with the OSHA Regional Office for technical assistance and questions relating to chemicals in laboratory inspections.
  6. Review policies, instructions, and guidelines issued by the State to determine that this change has been communicated to State personnel.
- F. **Background.** On May 4, 1993, OSHA published an Interim Final Rule for Lead in Construction (29 CFR 1926.62) which revised its existing lead rule applicable to the construction industry (29 CFR 1926.55). OSHA was required to take this action under the Housing and Community Development Act of 1992 (42 U.S.C. 4853). The agency was required to adopt an interim final standard in a 6-month period and, therefore, was not constrained to follow the Section 6(b) rulemaking procedures (i.e., proposal, comment period, hearings) of the Occupational Safety and Health Act of 1970.
- G. **Authorization to Review Limited Medical Information.** Appropriately qualified compliance personnel, under the direction of the Supervisory Industrial Hygienist, are authorized to review medical records and medical opinions mandated by OSHA standards. This authorization has limitations and procedures which must be followed as set forth in OSHA Instructions CPL 2-2.30 and CPL 2-2.33.
- H. **Organization of Instruction.** Compliance guidance is set forth in this instruction. Additional information and clarifications are provided as follows:
1. Appendix A - Inspection Guidance and Citation Policy.
  2. Appendix B - Exposure Calculation for Compliance Purpose.
  3. Appendix C - Requirements Triggered by Air Lead Levels.
  4. Appendix D - Medical Surveillance Flowchart.
  5. Appendix E - Summary and Explanation of the Standard

- I. **Inspection Guidance.** Inspections to assess compliance with 29 CFR 1926.62 must be conducted by a Compliance Safety and Health Officer (CSHO) appropriately trained in conducting inspections in the construction industry (e.g., thoroughly familiar with all effective provisions of 29 CFR 1926.62 and with the guidelines in this instruction). Citations issued for violations of 29 CFR 1926.62 must be reviewed by the supervisory industrial hygienist.
  1. **Compliance Procedures.** Guidelines for determining if the employer is in compliance with the standard, and for classifying and grouping violations, are presented in Appendix A of this instruction. (See the FOM, Chapter IV.)
    - a. In cases where deviations from the recommended guidelines for classifying and grouping of violations seem to be warranted, the Regional Office shall inform the Directorate of Compliance Programs. The reasons for the deviations shall be noted in the case file.
    - b. In areas where this instruction differs from the OSHA Technical Manual and/or the FOM, then this instruction (in that it presents a special program limited to lead exposures in construction) takes precedence.
  2. **Biological Monitoring.** If biological testing of exposed employees is determined to be necessary for OSHA to document a violation of 29 CFR 1926.62, the Regional Office shall arrange for medical support through the Directorate of Technical Support - Office of Occupational Medicine (OOM), the Public Health Service, or the local hospital/health department.
    - a. The Directorate of Technical Support and the Directorate of Compliance Programs will work with the Office of the Solicitor in coordinating and in assisting the Regional Offices in the handling of these cases.
  3. **Interface With Other Standards.** The recordkeeping requirements for recording cases to the OSHA 200 log and a supplementary record, under 29 CFR 1904.2 and 1904.4, apply in certain lead exposure situations.

- a. Cases requiring an entry to the log would include blood lead test levels greater than or equal to 50 µg/100 g whole blood, employee symptoms of lead poisoning or medical removals.
  - b. The lead in construction standard does not remove any obligations of the employer to comply with the Hazardous Waste Operations and Emergency Response standard, 29 CFR 1926.65, and/or the Hazard Communication standard, 29 CFR 1926.59.
4. **Federal Enforcement in State Plan States.** OSHA will enforce 29 CFR 1926.62 in each State Plan State until the State has promulgated a new standard for lead that is at least as effective as the Federal standard. Accordingly, until a State Plan State has promulgated such a standard, it will refer all complaints involving lead to the OSHA Regional Office for investigation.
5. **Referrals to Other Federal Agencies.** Several Federal and State agencies have authority and responsibility for specific lead activities, such as those mandated under the Housing and Community Development Act of 1992 (42 U.S.C. 4853). For example:
  - a. Under the direction of the Environmental Protection Agency, State departments of health and environment regulate aspects of lead-based paint abatement, including training and certification of abatement contractors and employees and the use of containment.
  - b. Under the direction of the Department for Housing and Urban Development (HUD), contractors working for public housing authorities must be in compliance with HUD guidelines for lead-based paint abatement.
  - c. Under the direction of the Federal Highway Administration, State highway agencies must take steps to integrate existing health and safety regulations into contract specifications.
  - d. Where the compliance officer observes conditions which may fall within these agencies' jurisdictions, appropriate referrals and coordination of enforcement activities shall be ensured.

6. **Safety and Health Protection for the CSHO.** The CSHO must comply with all safety and health rules and practices at the job site and use the appropriate protective clothing and equipment required by OSHA standards or by the employer for the protection of employees. If the employer's provisions for employee protection does not meet the requirements of OSHA standards then the CSHO must comply with OSHA standards. (See the FOM, Chapter III.) Where CSHOs have potential for being or have been exposed to lead in excess of the action level (AL), initial medical surveillance (blood test) for analysis of blood lead and zinc protoporphyrin (ZPP) levels must be made available by OSHA. The provision of blood tests will be coordinated with the Office of Occupational Medicine.

Joseph A. Dear  
Assistant Secretary

DISTRIBUTION: National, Regional, and Area Offices  
All Compliance Officers  
State Designees  
NIOSH Regional Program Directors  
Consultation Project Managers

## Appendix A

### Inspection Guidance and Citation Policy

#### Regulation

#### Inspection Guidance

1926.62(a)

#### Scope and application

(a)

All occupational exposure to lead occurring in the course of construction work, including maintenance associated with construction work is covered by 29 CFR 1926.62. Construction work is defined as construction, alteration and/or repair, including painting and decorating per 29 CFR 1910.12(b).

- Construction work covered by 29 CFR 1926.62 includes any repair or renovation activities or other activities that disturb in place lead-containing materials (LCM)(e.g., steel structure renovation and repair), but does not include routine cleaning and repainting (e.g., minor surface preparation and repainting of rental apartments between tenants or at scheduled intervals) where there is insignificant damage, wear or corrosion of existing lead- containing paint and coatings or substrates.
- Employees performing maintenance activities not associated with construction work are covered by the general industry standard for lead, 29 CFR 1910.1025. Maintenance activities covered by the general industry standard are those which involve making or keeping a structure, fixture, or foundation in proper condition in a routine, scheduled, or anticipated fashion.

For all occupational exposure to lead occurring in the course of construction work, the standard does not specify a minimum amount or concentration of lead that triggers a determination that lead is present and the potential for occupational exposure exists. However, if the employer has appropriately tested all potential sources of lead (e.g., tested all layers of paints and coatings that may be disturbed) utilizing a valid detection

method for the presence of lead and found no detectable levels of lead, the standard does not apply.

NOTE: Until further guidance is sent to the field, the Directorate of Technical Support should be contacted if the CSHO needs guidance concerning valid test methods.

The lead-based paint hazard reduction activities defined in Title IV of the Housing and Community Development Act of 1992, including interim controls and abatement are also covered by this standard. These activities are defined in the Act as follows:

- ABATEMENT - The term `abatement' means any set of measures designed to permanently eliminate lead- based paint hazards in accordance with standards established by the Administrator under this title. Such term includes:
  - the removal of lead-based paint and lead- contaminated dust, the permanent containment or encapsulation of lead-based paint, the replacement of lead-painted surfaces or fixtures, and the removal or covering of lead contaminated soil; and
  - all preparation, cleanup, disposal, and post abatement clearance testing activities associated with such measures.
- INTERIM CONTROLS - The term `interim controls' means a set of measures designed to reduce temporarily human exposure or likely exposure to lead-based paint hazards, including specialized cleaning, repairs, maintenance, painting, temporary containment, ongoing monitoring of lead-based paint hazards or potential hazards and the establishment and operation of management and resident education programs.



All such activities (with the exception of the establishment and operation of management and resident education programs) conducted as part of an employer's lead abatement program, or a lead operations and maintenance program that implements specific interim controls, are covered by 29 CFR 1926.62.

**Regulation**

**Inspection Guidance**

1926.62(c)

**Permissible exposure limit**

(c)(3)

The standard permits the use of respiratory protection and the adjustment of employee exposure based on the assigned protection factor of the respiratory protection to achieve compliance with the permissible exposure limit (PEL) only if the employer has complied with 29 CFR 1926.62(e)(1), Engineering and work practice controls and (f), Respiratory protection. (See Appendix B for guidance on exposure calculation for compliance with 1926.62(c)(3).)

**Citation Policy**

When the calculated time weighted average (TWA) after taking into account the protection factor of the respirator still exceeds the PEL, a citation for violation of 29 CFR 1926.62(c)(1) or (c)(2) shall be issued. Section (c)(3) is explanatory in nature and shall not be cited. Note that the employer is also in violation of 29 CFR 1926.62(f)(2)(i) as well as (c)(1) or (c)(2). The TWA documented for citation shall be calculated without the use of the protection factor of the respirator.

1926.62(d)

**Exposure assessment**

Compliance with 29 CFR 1926.62(d) was to have been accomplished by August 3, 1993.

(d)(1)

The employer must initially determine if any employees may be exposed at or above the action level (AL) of  $30 \mu\text{g}/\text{m}^3$  measured as an 8-hour TWA. The employer must conduct initial exposure assessments of all workplaces and operations where lead

or lead-containing materials are being used, disturbed, or removed. Exposure assessments must meet the requirements of 1926.62(d)(1)(ii)-(iv). Paragraph (d)(1)(ii) defines employee exposure as that exposure that would occur if the employee were not wearing a respirator. All exposure assessments must be made in accordance with 1926.62(d)(1)(ii).

- Air samples collected **inside** of a respirator (i.e., Type CE, abrasive blast respirator with hood/helmet) do **not** meet the requirement of (d)(1)(ii) and shall **not be used** for determining compliance to the PEL, although such samples may be useful in evaluating the respiratory protection program.
- Air samples must be collected outside of this type of respirator (Type CE) as near as practical to the employee's breathing zone (nose and mouth) for determining compliance to the PEL.

(d)(2)

The employer must implement mandatory employee protective measures prior to and during the exposure assessment of tasks presumed to generate lead exposures greater than the PEL in accordance with the requirements of 1926.62(d)(2)(v). These interim control measures for the tasks identified under (d)(2)(i)-(iv) are consistent with the requirements of 1926.62(f), (g), (i)(2), (i)(5), (j)(1)(i), (l)(1)(i), and (l)(2)(ii).

- The level of respiratory protection can only be reduced when the employer demonstrates that the actual employee exposures are below the interim respiratory protection trigger levels.
- The compliance safety and health officer (CSHO) shall review the written compliance program, training records, exposure monitoring records, and biological monitoring records, where available, to determine whether the employer has assessed employee exposures and if interim control measures are being im-

plemented in accordance with 1926.62(d)(2)(v).

(d)(2)(i)(A)

For the purposes of complying with the requirements of this paragraph, demolition refers to dismantling, razing, or wrecking activities, and to demolition activities during rehabilitation, repair, or remodeling where structural members of the structure are not removed. This definition is based on the American National Standards Institute (ANSI) A10.6-1990 standard which defines "demolition" as dismantling, razing, or wrecking any fixed building or structure or any part thereof.

NOTE: Manual sanding and manual scraping, as listed in (d)(2) refers to **dry** sanding and **dry** scraping. Where wet methods are used, the employer may base the protection provided on the results of the initial exposure assessment, without having to provide interim protection.

(d)(3)

Objective or historical data can be used to satisfy the requirement for an initial exposure determination, except that for tasks covered by 1926.62(d)(2), actual employee exposure monitoring results or historical data (i.e., actual employee monitoring data obtained within the last 12 months) must be used since 1926.62(d)(3)(iv)(B) prohibits use of objective data for exposure assessment for these tasks. The employer must have the data and must have performed an exposure assessment using this data. The historic work data must be of sufficient quality to permit the employer to forego conducting the initial monitoring stipulated under (d)(3)(i).

- In accordance with 1926.62(d)(3)(iii), in order for historic work data to eliminate the employer's obligation to conduct the initial or periodic monitoring, the data must provide the levels of exposures to lead that employees receive during work operations conducted under workplace conditions closely resembling the processes, type of material, control methods, work practices, and environmental conditions used and prevailing during the

current work operations, or represent the highest level of exposure in accordance with (d)(3)(ii). This means that all factors which could significantly affect variation between historic and current conditions must be identified and assessed by the employer as part of the initial determination.

- In determining whether the historic data is sufficiently similar to current conditions as required by 1926.62(d)(3)(iii), the historic data shall meet these specific conditions, which are also listed in the preamble of this standard (FR, Vol. 58, No. 84, page 26599). These conditions are as follows:
  - The data upon which employee exposure assessments are based are scientifically sound and collected using methods that are sufficiently accurate and precise.
  - The processes and work practices in use when the historical data were obtained are essentially the same as those to be used during the job for which initial monitoring will not be performed.
  - The characteristics of the lead containing material being handled when the historical data were obtained are essentially the same as those on the job for which initial monitoring will not be performed.
  - Environmental conditions prevailing when the historical data were obtained are essentially the same as for the job which initial monitoring will not be performed.

With respect to the conditions listed above, the CSHO shall evaluate the following:

- The state of deterioration of the LCM, then and now.

- The amount or concentration of lead in the LCM, then and now.
  - Engineering controls and work practices used (e.g., work area dimensions, ventilation positioning and airflow, crew size, tools and application or removal methods, containment, wet methods, duration of the work shift).
  - Employee training and supervision with respect to the use of work practices and personal protective equipment, then and now.
- If the state of such variable factors was not noted at the time the historic work data was collected, then it is unknown whether the data would reflect current exposures, and the data may not be substituted for initial monitoring. [In that instance, or if the CSHO determines that significant differences exist between the historical and current conditions which could cause the employee's current exposure to be underestimated, a violation of 29 CFR 1926.62(d)(3)(i) exists.]
  - If the employer is relying on monitoring data obtained on projects conducted by other employers or data were obtained more than 12 months before, but no significant differences exist and the historical data would otherwise be an acceptable substitute, a de minimis violation would exist.

(d)(6) Initial determinations and/or subsequent determinations that reveal employee exposures to be below the action level remove the employer's obligation to continue exposure monitoring, except if the conditions in 1926.62(d)(7) that require additional monitoring exist.

(d)(8) Paragraph (d)(8)(i) requires the employer to notify the exposed employee of the results within 5 working days after completion of the exposure assessment. This shall be interpreted as meaning within 5 working days from the employer's receipt

of the monitoring results or the analysis of the objective or historical data.

- To verify whether the employer is complying with the requirements of 1926.62(d), the CSHO shall interview the employer, the competent person, employees, and employee representatives to determine if any exposure assessments were conducted.
- The CSHO must review exposure assessment records such as current or historical air monitoring data, objective data, { material safety data sheets/ safety data sheets (MSDSs/SDSs) } or any other data that documents the existence of a lead hazard, and verify if the exposure assessment records were appropriately applied to each exposure assessment.
- The CSHO shall determine how the employer notifies the employees of the results of their exposure assessment and must verify if the employee notifications are given within the required time.

### **Citation Policy**

Violations of any of the provisions under 29 CFR 1926.62(d) shall normally be cited as serious.

Where the employer has not made initial determinations of employee exposures, the CSHO shall cite 1926.62(d)(1)(i) and group with (d)(1)(iii) for a representative sample of each job classification for each violation. If a job classification requires more than one representative sample, all of these occurrences shall be combined for each violation.

Where the employer is in violation of the requirements of 1926.62(d)(2)(v) while performing tasks covered under paragraphs (d)(2)(i), (d)(2)(ii), (d)(2)(iii), and (d)(2)(iv), the CSHO shall cite each specific requirement of 1926.62(d)(2)(v) and group with the corresponding provision of 1926.62 (f), (g), (i)(2), (i)(5), (j)(1)(i), (l)(1)(i),

and (l)(2)(iii)(C) as referenced in 1926.62(d)(2)(v)(A)-(F).

When citing violations of 29 CFR 1926.62(d)(8), the CSHO shall consider treating the violation as de minimis where an employer has **rarely** delayed notification beyond the deadline. An other-than-serious violation may be considered when exposure results are below the action level and notification has been delayed beyond 5 days.

**Regulation**

**Inspection Guidance**

1926.62(e)

**Methods of Compliance**

Compliance with 29 CFR 1926.62(e)(1) was to have been accomplished by no later than October 3, 1993. Compliance with all the other requirements of 29 CFR 1926.62(e) was to have been accomplished by August 3, 1993. The employer is required to use all feasible engineering and work practice controls, including administrative controls, before relying on respiratory protection to achieve compliance with the PEL under 29 CFR 1926.62(c)(3).

(e)(1)

**Engineering controls:** The CSHO shall evaluate the feasibility of additional engineering controls on a case-by-case basis. Feasibility shall be determined on the basis of factors including, but not limited to, site conditions, the scale of the job and the effectiveness of the method in completing the planned job. If it is determined that a particular engineering or administrative control not already implemented is feasible, the control shall be identified as an appropriate abatement method.

It may be useful to consult the Preamble, Table 5, "Analysis of Engineering Controls and Respirators Needed to Achieve Compliance with the 50  $\mu\text{g}/\text{m}^3$  PEL", or to consult with the Directorate of Compliance Programs for guidance.

**EXAMPLE:** The CSHO is evaluating a highway bridge renovation where abrasive blasting is being conducted in full containment to deter-

mine feasible engineering controls. As indicated in Table 5, it is technologically feasible for the employer to use mechanical dilution ventilation for the enclosure operation. In addition, HEPA vacuums and wetting agents are feasible controls for this type of project. (In this instance, it would not be considered feasible to substitute local exhaust ventilation or shrouded tools for abrasive blasting methods already in use.)

**Work practice controls:** Work practice controls shall be evaluated on a case-by-case basis and in conjunction with engineering controls.

**Respiratory controls:** Where engineering and work practice controls have been implemented to reduce exposure to the lowest feasible level but exposures still exceed the PEL, respiratory protection that complies with 1926.62(f) shall also be used to protect employees.

(e)(2)

The CSHO shall review the employer's written compliance program. It must be available at the worksite, and implemented prior to the start of the job. The employer may elect to provide a written plan that is unique to each worksite, but this is not required as long as the elements required by 29 CFR 1926.62(e)(2)(ii)(A)-(I) are specific to the conditions at the job site.

- The CSHO shall evaluate the plan to determine whether it contains the required elements and also that it requires evaluation by a competent person.
- The CSHO shall evaluate the plan to determine whether the employer has designated specific employee job responsibilities, particularly those of the competent person with respect to the specific means that are employed to achieve compliance.
- The written program shall be revised and updated at least every 6 months. This revision includes a review of the entire program,



with appropriate changes made to reflect the current status of the project.

(e)(2)(ii)(H) The CSHO shall identify the exposing employers whose employees have potential exposure to lead, and contact them to determine whether the creating employer has adequately notified them of the hazard, and whether all affected employees have been informed. (See the FOM, Chapter XII.)

(e)(2)(iii) At the start of the inspection, the CSHO shall identify the competent person (CP) and, if appropriate, include the CP on the walkaround and other phases of the onsite inspection.

- The CSHO shall interview the CP to determine his or her qualifications (experience, training, and credentials) relevant to lead hazards and specific CP activities, responsibilities, and authority as designated by the employer in the written compliance program.
- Unless the employer has provided for that element of the written compliance program (e.g., site characterization and analysis, ventilation design, performing sampling) through other means, the CP's duties include identifying lead hazards and taking corrective action. For example this may include:
  - Determine prior to the performance of the job whether lead is present in the workplace,
  - Ensure the adequacy of any employee monitoring data and exposure assessments,
  - Ensure that all employees wear **required** protective work clothing (PWC) and personal protective equipment (PPE) and are trained in and use appropriate exposure control methods,
  - Ensure that proper hygiene facilities are provided and that employees are trained and use those facilities,

- Ensure that engineering controls are designed, operated and maintained properly,
  - Demarcate lead work areas, and
  - Take effective measures to reduce lead hazards.
- The CSHO shall identify the extent and frequency of the CP's inspections and determine whether the inspections are actually conducted.
  - The CSHO shall establish how inspection findings are recorded and reported and whether the identified deficiencies are corrected in a timely and consistent fashion.

(e)(3) The CSHO shall review the employer's evaluation of mechanical ventilation performance. The employer's evaluation must include, but is not limited to, personal monitoring data, documentation of ventilation specifications and checks by the employer or competent person to assure performance, a written maintenance procedure as part of the written compliance program and the implemented schedule for maintenance by qualified personnel to verify the performance of any mechanical ventilation. Where possible, the CSHO shall collect ventilation measurements to verify the effectiveness of the mechanical ventilation.

(e)(4) The CSHO shall evaluate the job rotation schedule to verify compliance with 29 CFR 1926.62(e)(4). The information specified in paragraphs (e)(4) and (e)(2)(ii)(G) must be part of the written compliance program if administrative controls involving job rotation are used.

(e)(4)(ii) The employer is required to have exposure data that accurately represents the cumulative eight hour TWA exposure for each rotated employee. The CSHO shall evaluate these data and those data from the sampling required under paragraph (d)(3)(i) to determine if the rotation is effective in adequately reducing employee exposure.

## Citation Policy

An employer shall be cited for violation of 29 CFR 1926.62(e)(1) when engineering and work practice controls, including administrative controls, have not been implemented in accordance with (e)(1).

- Where the employer's implementation of respiratory protection as required under (e)(1) does not maintain or reduce employee exposure to or below the PEL, the CSHO shall cite as serious each violation of 29 CFR 1926.62 (e)(1) and group with paragraph (c)(1). Note that the employer is in violation of 29 CFR 1926.62(f)(2)(i) as well.

EXAMPLE 1: In an abrasive blasting operation where some engineering and work practice controls are implemented (as above), and the employer relies upon an adequate respiratory protection program to further reduce employee exposure to or below the PEL; if, with all such controls being utilized and accounting for the protection factor of the respirator, the employees are still overexposed, then a violation of 29 CFR 1926.62(e)(1) exists if it can be shown that additional feasible alternative engineering and/or work practice/administrative controls could have been implemented to reduce employee exposure.

EXAMPLE 2: If during a torch-cutting operation an employee is overexposed to lead fumes without the use of engineering controls, regardless of the use of respiratory protection, a violation of 29 CFR 1926.62(e)(1) exists because the employer did not implement available feasible engineering controls such as local exhaust ventilation and work practices such as stripping back lead-containing coating.

If an employee is exposed above the PEL and the employer does not have a written compliance program, violations shall be cited as serious and (e)(2) and (c)(1) shall not be grouped. If the compliance program is substantially in effect and

only minor deficiencies are found, then violations are to be cited as other-than-serious. If compliance programs have major flaws, such as requirements of 29 CFR 1926.62(e)(2)(ii)(A-I) that are not addressed, violations shall be cited as serious and combined with citations of the missing elements of (A-I). However, the employer shall not be penalized more than if the employer had no program.

A violation of paragraph (e)(2)(ii)(H) exists where the compliance program does not describe specific arrangements (designate contacts and communication procedures). Where there is actual bystander employee exposure, the creating employer shall be cited for violation of paragraph (e)(2)(ii)(H) and the citation issued in accordance with the FOM, Chapter V, F.2.

Violations of paragraph (e)(2)(iii) exist when:

- No CP has been appointed,
- The CP is not capable of investigating and identifying lead sources, hazards and appropriate control measures,
- The CP does not inspect on a regular basis, or frequently enough to effect a consistent level of lead hazard control.

Violations of paragraph (e)(3) shall be considered serious and shall be grouped with 29 CFR 1926.62 (e)(2)(ii)(B) and (e)(2)(iii) where appropriate.

Violations of paragraph (e)(4) shall be considered serious or other-than-serious depending on the degree of deficiency. If controls are not in writing, 29 CFR 1926.62(e)(2)(ii)(G) will be cited using the same guidelines.

Violations of paragraph (e)(5) shall be considered serious and grouped with other appropriate paragraphs or standards. For example, if employees are observed dry sweeping instead of vacuuming, 29 CFR 1926.62(e)(5) may be grouped with paragraphs (e)(2)(iii), (e)(1), and/or (h)(3). In the case

of torch cutting, paragraph (e)(5) may be grouped with 29 CFR 1926.354(c).

**Regulation**

**Inspection Guidance**

1926.62(f)

**Respiratory protection**

Compliance with 29 CFR 1926.62(f) was to have been accomplished by no later than August 3, 1993.

(f)(1)

The respirators that employees use must have been provided by the employer at no cost to employees. The employer must ensure that use of respirators comply with 29 CFR 1926.62(f)(1).

(f)(2)

In selecting the appropriate respiratory protection, the employer must refer to 29 CFR 1926.62 (f)(2), Table 1, for selection guidance.

- Table 1 assigns a higher protection factor (PF) to full-facepiece air-purifying respirators (50) than to powered air-purifying respirators (PAPR) with a loose-fitting hood or helmet (25). This is because the PAPR's PF is in part based on the lack of a tight face seal. Tight-fitting PAPRs are given a higher PF (50).
- The CSHO shall check the respirator manufacturer's product literature, examine the respirator and observe its use in making a determination as to whether a PAPR is loose or tight-fitting.

NOTE: For abrasive blasting operations, there are two types of Type CE abrasive blast respirators. These respirators have an assigned PF of 25 and 2000. Under the requirements of 29 CFR 1926.62(d)(2), the abrasive blast respirator with a PF of 2000 must be used during the exposure assessment as an interim control. Presently, the market availability of an abrasive blast respirator with a PF of 2,000 and integral head protection is

limited, which could impact on the employer's ability to fully comply with (d)(2).

- Where market availability is limited, as an alternative method of evaluating compliance, the CSHO shall make a determination that the employer is making reasonable and timely effort to protect the employee. The following considerations shall be taken into account in determining whether the employer has taken sufficient steps to protect employee:
  - Review the purchase invoices to document that the employer has, in a timely fashion, been (and continues) pursuing purchase of the required abrasive blast respirators;
  - Make an evaluation of the effectiveness of the engineering and work practice controls; and
  - Determine if the employer has taken additional steps to monitor the employee's health such as increasing the frequency of biological monitoring to determine if the employees have been adequately protected. These steps will be necessary as a method of evaluating appropriate abatement.

(f)(3)

The employer is required to ensure that an employee who must wear a respirator in accordance with 29 CFR 1926.62(f)(1) is properly fitted and qualified for respirator use. Paragraph (f)(3)(ii) requires that the fit test, whether qualitative or quantitative, shall be in accordance with 1926.62, Appendix D.

NOTE: Qualitative fit tests are allowed only for testing the fit of negative pressure half-mask respirators where they are permitted to be worn.

The CSHO shall review the employer's fit test records to determine if employees using respirators were fit tested for the respirators they are using. Also, an evaluation of the fit test methods shall be conducted to determine if the appropriate fit test methods are being employed.

(f)(4)

The CSHO shall check to determine if there is a respirator program in place and if the program is in accordance with 29 CFR 1910.134(b), (d), (e), and (f).

### **Citation Policy**

Elements of (f) may be grouped together, however violations of (f) shall not be grouped with violations of (c). Violations of any of the provisions under 29 CFR 1926.62(f) shall be cited as serious.

### **Regulation**

### **Inspection Guidance**

1926.62(g)

### **Protective work clothing and equipment**

The CSHO shall determine compliance with 29 CFR 1926.62(g) by:

- Interviewing employers, competent persons, employees, and employee representatives.
- Observing work procedures and practices, including implementation of the written compliance program.
- Reviewing employer's exposure assessment data and/or performing air monitoring to determine:
  - If the PEL is exceeded and if protective work clothing (PWC) and personal protective equipment (PPE) are required, and
  - The required frequency of cleaning and replacing PWC and PPE. Protective work clothing must be provided weekly, unless the exposure levels exceed  $200 \mu\text{g}/\text{m}^3$ . Then the PWC must be provided daily.

- (g)(1) Protective work clothing must prevent lead from contacting employees' work or street clothes, undergarments, or skin, wherever 29 CFR 1926.62(g) applies.
- The employer is not obligated under this standard to provide general work clothes to employees, but is responsible for providing PWC. Similarly, if shoes are provided, they do not necessarily need to be safety shoes as defined by the ANSI Z-41 series, unless foot protection is required by the safety hazards at the worksite. If shoes are not considered PWC, they must be covered and protected by shoe covers that prevent contamination.
  - If work clothes and shoes are intended to protect the employee's body from contamination, they are to be provided by the employer. Disposable PWC which are frequently ripped or fall apart under normal use would not be considered "appropriate protective work clothing."
    - Where employees are providing or paying for their own PWC and such clothing is required, a violation exist.
    - The employer is required to comply with paragraph (g) during assessment of exposure under 1926.62(d)(2)(v)(B). Where employees are performing tasks covered by 1926.62(d)(2) and an exposure assessment has not been performed, PWC shall be provided and used.
- (g)(2)(iii) PWC which has been rendered inappropriate, (e.g., when employer-provided shoes develop holes or split seams) must be promptly repaired or replaced by the employer, at no cost to the employee. Effective protection against contamination of employees' skin, hair, and garments must be maintained at all times.
- (g)(2)(v) PWC is to be stored in a closed container at the end of the workshift until such time as it shall



be cleaned, laundered, or disposed of in accordance with 29 CFR 1926.62(g)(2)(ii).

(g)(2)(vi) Laundering/cleaning of work clothes that are used as PWC shall be provided by the employer. Protective work clothing must be stored in the change area per paragraph (i)(2)(ii) and may not be sent home with the employee for cleaning per paragraph (i)(2)(iii).

(g)(2)(viii) Paragraph (g)(2)(viii) prohibits the removal of lead from protective clothing and equipment by any means that would disperse lead into the air. However, a violation of paragraph (g)(2)(viii) inside an abrasive blasting enclosure or other containment shall be considered de minimis, where the employer has provided employees with adequate respiratory protection and mechanical ventilation is being used. A violation of 29 CFR 1910.242 may exist.

### **Citation Policy**

Where employees are performing tasks specified in 1926.62(d)(2) and an exposure assessment has not been performed, and PWC is not provided or used. This violation shall be cited as serious and grouped with (d)(2)(v)(B).

Violations of all other sections of 29 CFR 1926.62(g) shall be cited as serious.

**Grouping:** Sections of 1926.62(g) shall not be grouped with other sections of this standard except paragraph (d)(2)(v)(B). Within 1926.62(g), sections may be grouped together and cited as one serious violation.

### **Regulation**

1926.62(h)

(h)

### **Inspection Guidance**

#### **Housekeeping**

The CSHO shall evaluate the employer's housekeeping through review of the written compliance program, implementation of program and observed work practices. When a determination has been made that an employer could reduce contamination of

surfaces from occupational sources, wipe or bulk samples are to be taken to provide evidence that the surface contamination is, in fact, lead.

(h)(5)

29 CFR 1926.62(h)(5) prohibits cleaning with compressed air as a housekeeping practice unless effective exhaust ventilation is in use. However, certain circumstances may exist where cleaning using this technique is necessary.

**EXAMPLE:** When cleaning the seams of containment walls prior to striking the enclosure for movement to a new location, vacuum techniques may not be adequate to remove lead dust from the crimps in the seams and the dust could be spread if it is not cleared prior to movement of the enclosure. In this instance, the exhaust ventilation used during blasting must be in operation while employees clean with compressed air.

**NOTE:** Section 29 CFR 1926.25 requires that containers be provided for the collection and separation of waste and other refuse, and that these containers be covered where disposing of hazardous or harmful material is involved. Employers shall provide covered containers, or perform suitable bagging (such as double bagging) for lead- containing or lead- contaminated refuse and waste materials. Violations of 29 CFR 1926.25 shall be cited as serious.

### **Citation Policy**

Violations of 29 CFR 1926.62(h)(5) shall be cited as serious.

### **Regulation**

1926.62(i)

### **Inspection Guidance**

#### **Hygiene facilities and practices**

This section, 29 CFR 1926.62(i), requires employers to provide hygiene facilities and stresses that employers shall ensure employee compliance with basic hygiene practices.

- The CSHO shall evaluate the effectiveness of employers hygiene facilities and practices through review of the written compliance program, implementation of the program and observed practices.
- The CSHO shall conduct appropriate wipe and air samples where the cleanliness of the change areas, storage facilities, and/or lunchrooms/eating areas is in question.
- In determining whether an employer has maintained surfaces of hygiene facilities free from contamination, OSHA recommends the use of HUD's recommended level for acceptable decontamination of  $200 \mu\text{g}/\text{ft}^2$  for floors in evaluating cleanliness of change areas, storage facilities, and lunchrooms/eating areas. OSHA would not expect that surfaces should be any cleaner than this level.

(i)(2)(i) The CSHO shall determine if clean change areas equipped with acceptable storage facilities are available for all employees performing tasks covered by 29 CFR 1926.62(d)(2), at least until the assessment of exposure is complete. If employees are exposed to lead above the PEL, then change areas are still required.

(i)(3)(i) The CSHO shall determine the feasibility of shower facilities on a case-by-case basis using factors including, but not limited to the following:

- Location;
- Availability of acceptable water supply;
- Climate; and
- Duration of the job.

(i)(4)(ii) To evaluate employer compliance with 29 CFR 1926.62(i)(4)(ii), the CSHO shall use methods including, but not limited to the following:

- Observe work practices (such as frequency of table cleaning, hand and face washing, and removal of contaminated PPE);
- Conduct employee interviews (re: work practices, indications of elevated blood lead levels, training, enforcement, etc.);
- Note physical location of lunchroom facilities or eating areas relative to the work area; and
- Take wipe samples from surfaces that will be contacted by employees.

(i)(5)(i)

29 CFR 1926.51(f) states that:

"The employer shall provide adequate washing facilities for employees engaged in the application of paints, coating, ... , or in other operations where contaminants may be harmful to the employees. Such facilities shall be in near proximity to the worksite and shall be so equipped as to enable employees to remove such substances." This requirement shall be enforced regardless of the levels of airborne lead (or other toxic contaminant), if the potential for employee exposure via direct contact exists.

NOTE: Provision (i)(5) applies to all employers covered by 1926.62, regardless of the employee's exposure level. All other provisions of 1926.62(i) apply to employers who have employees exposed to airborne lead above the PEL, without regard to the use of respirators.

### **Citation Policy**

Where applicable, any violation of 29 CFR 1926.62 (i) may be grouped with violations of 29 CFR 1926.62(e)(5) and classified according to the FOM, Chapter IV.

Violations of 29 CFR 1926.62(i)(1) may be cited as serious or other-than-serious depending on the

degree of the deficiency. Where appropriate, these may be grouped with violations of 29 CFR 1926.62(i)(4)(iii).

Violations of 29 CFR 1926.62(i)(2) shall be cited as serious and may be grouped with violations of 29 CFR 1926.62(g)(2)(iv) where appropriate.

Violations of 29 CFR 1926.62(i)(3) shall be cited as serious.

Violations of 29 CFR 1926.62(i)(4) may be cited as serious or other-than-serious depending on the degree of the deficiency. Where appropriate, violations may be grouped with violations of 29 CFR 1926.62(i)(1).

Violations of 29 CFR 1926.62(i)(5)(i) shall normally be considered serious when sampling shows employee exposure above the PEL and other-than-serious when sampling shows employee exposure at or below the PEL. Where appropriate, violations of 29 CFR 1926.62(i)(5)(i) may be grouped with violations of 29 CFR 1926.51(f) and classified according to the FOM, Chapter IV.

## **Regulation**

1926.62(j)

## **Inspection Guidance**

### **Medical surveillance**

To evaluate employer compliance with these provisions, the CSHO may use methods including, but not limited to the following:

- Interview the employer and employees, and when necessary the healthcare professionals administering the medical provisions;
- Review the medical records required to be maintained by the employer;
- Review individual medical records.

NOTE: Access to these records may only be gained by signed employee consent or with a medical access order. CSHOs considering a review of spe-

cific medical records shall refer to 1913.10 as well as CPLs 2-2.32 and 2-2.46 for guidance in safeguarding employee privacy rights and shall consult with the Directorate of Technical Support, Office of Occupational Medicine for assistance in the proper interpretation of those records.

Evaluation points for all requirements of the medical surveillance program include:

- Were all eligible employees included in the program?
- Were all required tests and examinations performed at the required intervals?
- Did the employer take all actions mandated by the standard when tests or exams triggered an obligation?
- Were the appropriate records generated, maintained and provided to the appropriate people?

(j)(1)(i)

Any employee exposed to airborne lead concentrations at or above the action level on any day must be provided initial medical surveillance (blood test) for analysis of blood lead and zinc protoporphyrin (ZPP) levels. For compliance, OSHA recommends that initial medical surveillance shall be made available prior to assignment but no later than reasonably promptly after the employee has had an exposure above the action level. Citations shall be issued where the employer has not made available initial medical surveillance reasonably promptly. OSHA considers 48 hours an appropriate measure of reasonable promptness.

(j)(1)(ii)

Employees with an exposure at or above the action level (AL) for more than 30 days in any consecutive 12 months must be provided coverage in the medical surveillance program required under paragraph (j)(2) and (j)(3). The medical surveillance program consists of periodic biological monitoring and a medical examination.

The employer is required to make available annual medical examinations to employees for whom a blood sampling test conducted at any time during the preceding 12 months indicates a blood lead level at or above 40 µg/dl, even if the elevated blood lead level occurred prior to employment with the current employer.

[Above paragraph was corrected per [OSHA memorandum, December 5, 1994.](#)]

(j)(2) The CSHO shall confirm that employees entitled to periodic blood tests for blood lead and ZPP levels are provided those tests as specified in the standard.

Also, any employee with a blood lead test result at or above 50 µg/dl must be provided a follow-up blood test within two weeks after the employer receives the results.

OSHA has determined that the Free Erythrocyte Protoporphyrin (FEP) test is comparable to the ZPP test for determining lead toxicity. Where an employer uses the FEP test for the ZPP test, the CSHO shall treat the violation as de minimis.

(j)(2)(iii) The requirement to conduct a follow-up test applies to any test results, including the results of initial medical surveillance.

(j)(2)(iii) The CSHO shall confirm that blood tests are performed by an OSHA approved laboratory. Reference the OSHA Computerized Information System (OCIS) listing for "Blood Lead Laboratories."

(j)(3) The CSHO shall confirm that employees entitled to medical examinations and consultations are provided them as specified in the standard.

(j)(3)(ii) The content of the examinations may be confirmed by reviewing the information provided by the employer to the physician and by interviewing employees and the physician.

(j)(4) The CSHO shall conduct private interviews with selected employees to confirm that prophylactic chelation is not performed to keep blood lead

levels down and that if it is ever performed for medical reasons, all provisions of (j)(4)(ii) are followed.

### **Citation Policy**

Any violation of this paragraph shall be cited serious, even if airborne exposures to lead are between the action level and the PEL. Elements of (j) can be grouped when citing violations.

### **Regulation**

### **Inspection Guidance**

1926.62(k)

### **Medical removal protection**

Compliance with the medical removal protection (MRP) aspects of the standard can only be determined after review of the employer's medical surveillance program, as described in section (j).

(k)(1)(i)

Unlike the general industry standard for lead, the lead in construction standard, 29 CFR 1926.62, requires that a result of 50 µg/dl or more on two consecutive blood lead tests requires temporary medical removal of the employee and compensation with medical removal protection benefits (MRPB). Employers are not permitted to average blood lead test results to determine eligibility for medical removal.

If the result of an employee's initial medical surveillance (blood lead test) is at or above 50 µg/dl, and the result of a follow-up test is also at or above 50 µg/dl, then the employee must be removed in accordance with (k)(1)(i).

(k)(1)(ii)

Employees may qualify for medical removal protection benefits due to elevated blood lead levels or a final medical determination of detected medical condition that places the employee at increased risk of material impairment from exposure to lead. Both types of medical records are to be reviewed.

NOTE: An employee who has 30 or fewer days of exposure at or above the AL would only be removed for elevated blood lead levels and not pursuant to a final medical



determination, because the medical examinations and consultations required by paragraph (j) would only be required to be made available to employees exposed for more than 30 days at or above the AL.

The CSHO shall document each instance in which a worker should have been removed and then refer to the following sources to ensure that the removal did take place:

- The employer's medical removal records required by section (n)(3) of this standard;
- Air sampling data for the area(s) to which employee(s) were removed, showing exposure levels below the AL;
- Medical records showing that appropriate medical surveillance was provided during removal periods;
- Interviews with employees.

MRP shall be initiated immediately after the employer is informed of events triggering medical removal under the requirements of the standard.

Generally, with respect to the duration of MRP benefits, the maximum is 18 months or the duration of the job from which the employee has been removed, whichever comes first. The duration of the job would be defined by the specifics of the affected employee's hiring agreement. Whether the job has ended or not, may be determined by reviewing the job specifications and the status of the project.

- The CSHO must interview some employees covered by medical surveillance, the employer, and possibly other employees to determine the specifics of any agreement, and the nature of the employer's hiring practices. For example, if an employee is hired to perform sandblasting while a specific bridge is under renovation, MRP would be required to be pro-

vided only until all the sandblasting work on that bridge is completed. If an employee has been hired by a contractor as a sandblaster on a continuing basis, working on several projects at the determination of the employer, then MRP would be provided until the employee is returned to his or her former job status, for up to 18 months.

- If an employee has been terminated while on (or eligible for) MRP, the CSHO must determine whether this action may have prematurely terminated the provision of benefits, violating the standard. If any employees have subsequently been assigned to replace or perform tasks previously performed by the terminated employee, this shall be documented in the case file and may serve as the basis for a citation if MRP benefits were not provided for the duration of his or her former job.

(k)(2)

In determining compliance with the MRP benefits provisions the CSHO may use information sources such as, but not limited to, the following:

- Employer/employee interviews; records required under section (n)(3);
- Collective bargaining agreements;
- Copies of pay stubs;
- Other payroll, duty roster and personnel records;
- Any formally established company procedures for MRP;
- Current or past union grievances filed on the issue, including awards or settlement agreements;
- Information on union/management negotiations on implementation of MRP.

Employees removed under MRP are entitled to the same earnings, seniority and other rights and benefits they would have received if they had not been removed. Earnings include base wages plus any overtime, shift differentials, incentives and other compensation they would have received had they not been removed.

### **Citation Policy**

Any violation of paragraph (k) shall be cited as serious.

### **Regulation**

1926.62(l)

(l)(1)

### **Inspection Guidance**

#### **Employee information and training**

Although 29 CFR 1926.62(l) references 29 CFR 1926.59 and requires that all employees covered by the "Lead Exposure in Construction" standard receive hazard communication training, the Hazard Communication standard, 29 CFR 1926.59, would not normally cover employees subject to lead exposure generated from lead-containing materials (LCM) already in place on the job. Employees exposed to such hazards are covered by 29 CFR 1926.21(b)(2) which requires that the employer instruct each employee in the recognition and avoidance of unsafe conditions and in the regulations applicable to his or her work environment in order to control or eliminate any hazards or other exposure to illness or injury.

- Under this provision, the employer is required to instruct employees exposed to lead in the hazards of lead and in the requirements of the "Lead Exposure in Construction" standard even if the exposure does not exceed the action level. This instruction need not be as comprehensive as any of the training provided under 29 CFR 1926.62(l)(2).
- An effective employee training program provided under 29 CFR 1926.62(l) must include the elements listed in 29 CFR 1926.62(l)(2)(i)-(viii) and be specific as to the job conditions. A generic training program

can be used but must be modified to address site-specific issues such as what operations have exposures greater than the AL, engineering controls, work practices, PPE associated with specific job assignments, and the medical surveillance program.

- (1)(1)(i) The CSHO shall determine if employees exposed to lead below the action level are receiving appropriate information and training as required under 29 CFR 1926.59. This includes the requirements for { material safety data sheets/ safety data sheets (MSDSs/SDSs) }, warning signs and labels, and information and training.
- (1)(1)(ii) The CSHO shall determine if employees exposed to lead at or above the action level on **any** day, or to lead compounds that may cause eye or skin irritation are provided training in accordance with 29 CFR 1926.62(1)(2). The trainer must be able to address site-specific issues and demonstrate expertise in the area of lead hazards and their control. The CSHO shall verify this based on the completion of specialized courses, degree programs or work experience.
- (1)(2) This training is in addition to the other requirements under 29 CFR 1926.59 and applies when employee exposure is at or above the action level, without regard to the use of respiratory protection. The training must cover the areas specified in 29 CFR 1926.62(1)(2)(i)-(viii) and be presented in a manner that is appropriate to the employees' education, literacy level and language.

### **Citation Policy**

If employees exposed to lead have not received appropriate training, citations will be issued under the applicable portions of 29 CFR 1926.59 if the LCM was not pre-existing (i.e., was introduced into the worksite as part of a current job), or 29 CFR 1926.21 if the LCM is in-place (e.g., lead-containing paints and coatings, lead solder on existing plumbing). Deficiencies shall be classified as serious. **DO NOT CITE 29 CFR 1926.62 (1)(1)(i)** for violations of 29 CFR 1926.59.

Deficiencies of 29 CFR 1926.62(1)(1)(ii) shall be cited when employee exposure is at or above the action level or there is employee exposure to irritating lead compounds such as lead azide. They may be grouped with violations of 29 CFR 1926.59(h) and 1926.62(1)(2) where appropriate. Violations shall be classified as serious.

Violations of 29 CFR 1926.62(1)(3) shall be classified as serious or other-than-serious depending on the degree of the deficiency.

## **Regulation**

1926.62(m)

{ (m)(1 ~~2~~)(i) }

## **Inspection Guidance**

### **Signs**

When the employer has work areas where employee exposures exceed the PEL, warning signs shall be posted in each work area. The CSHO shall inspect the warning signs demarcating the lead work area.

- { o The employer shall post the following warning signs in each work area where an employee's exposure to lead is above the PEL: DANGER, LEAD WORK AREA, MAY DAMAGE FERTILITY OR THE UNBORN CHILD, CAUSES DAMAGE TO THE CENTRAL NERVOUS SYSTEM, and DO NOT EAT, DRINK OR SMOKE IN THIS AREA [1926.62(m)(1)(i)].
- o Prior to June 1, 2016, employers may use the following legend in lieu of that specified in paragraph (m)(1)(i) of this section [1926.62(m)(1)(v)]: WARNING, LEAD WORK AREA, POISON, and NO SMOKING OR EATING. }
- o The signs must be illuminated, cleaned, maintained and positioned as to be easily visible from all routinely used approaches to the lead work area and obvious both to the trained lead employee or any bystanders.

### **Citation Policy**

If the signs have not been posted in areas where airborne concentrations of lead exceeding the PEL have been measured or if the required wording is not used, a serious violation of { 29 CFR 1926.62(m)(1 ~~2~~)(i) } exists.

- o The CSHO shall consider a violation de minimis if the wording is not as required but similar in meaning and import. De minimis shall be considered if only a few signs are affected and posting is otherwise adequate.
- o Generally, other-than-serious citations under { 29 CFR 1926.62(m)(1 ~~2~~)(iii) } for poorly maintained or poorly illuminated signs will be

issued, unless the legend is totally illegible, in which case it shall be cited serious.

**Regulation**

1926.62(n)

**Inspection Guidance**

**Recordkeeping**

Compliance with 29 CFR 1926.62(n) was to have been accomplished by August 3, 1993. As a minimum:

- The CSHO shall review the employer's records to determine if the employer is in compliance with 1926.62(n), which requires that the employer establish a recordkeeping system, accurately maintain the records for the prescribed amount of time, make the records available upon request, and allow for proper transfer and disposition of the records. The CSHO shall interview employees to determine if they can review or obtain any of these records.
- The CSHO shall review the exposure assessment, medical surveillance, medical removal, and objective data records to determine if the recorded information meets the requirements of 29 CFR 1926.62(n)(1), (n)(2), (n)(3), and (n)(4).

## Appendix B

### Computation of the TWA Concentration for the Duration of the Work Shift When Respiratory Protection Is Permissibly Used to Comply with the PEL

1. **Applicability:** Document the engineering, work practice and administrative controls used by the employer to lower airborne concentrations of lead under paragraph (e)(1). Verify compliance with all requirements of 29 CFR 1926.62(f) Respiratory protection.
  - a. If all requirements of paragraphs (e)(1) and (f) are not met, the employer is not permitted to use the exception in 1926.62(c)(3) calculations and the TWA is to be calculated without regard to the protection factor of the respirators.
  - b. If the requirements of 1926.62(e)(1) and (f) appear to be met, the following information is needed:
    - (1) Concentration of airborne lead while respirators are worn;
    - (2) Concentration of airborne lead while respirators are not worn, if applicable; and
    - (3) The protection factor assigned in Table 1 to the respirator worn while sampling was performed.

2. **Formula:** Where  $X$  = Total hours in the shift (value must be at least 8)

$[(C_1)(T_1) + \dots (C_n)(T_n)]$  = Sum of the product of sample results and time sampled when employee was not wearing a respirator.

$[(C_{R1})(T_{R1}) + \dots (C_{Rn})(T_{Rn})]$  = Sum of the product of sample results and time sampled when employee was wearing a respirator.

$PF$  = Protection factor listed in Table 1 of 29 CFR 1926.62(f).

$$X - \text{hour TWA} = \frac{[(C_1)(T_1) + (C_n)(T_n)] + [(C_{R1})(T_{R1})/PF + \dots (C_{Rn})(T_{Rn})/PF]}{X}$$

3. **Example:** Sample  $A_r$  was collected over 4 hours while the employee was wearing a one-half mask air purifying respirator with high efficiency particulate filters. Sample  $B$  was collected over 4.5 hours while the employee was not wearing a respirator. The work shift was 9 hours long; zero exposure was assumed for the 1/2 hour at the end of the shift when the employee showered.

Sample  $A_r$  result:  $110 \mu\text{g}/\text{m}^3$

Sample  $B$  result:  $80 \mu\text{g}/\text{m}^3$

Using the formula:

$$TWA = \frac{(0 \mu\text{g}/\text{m}^3)(0.5 \text{ hrs}) + (80 \mu\text{g}/\text{m}^3)(4.5 \text{ hrs}) + (110 \mu\text{g}/\text{m}^3)(4 \text{ hrs})}{9}$$

The 9-hour TWA for this employee was  $45 \mu\text{g}/\text{m}^3$ . The adjusted PEL for a 9-hour shift is  $44 \mu\text{g}/\text{m}^3$ . The 95% confidence limits must still be calculated to determine noncompliance.



## Appendix C

### Requirements Triggered by Air Levels


#### Applicable Paragraphs of 1926.62

For Specific Air Lead Levels					During Assessment of Trigger Tasks
Regardless of Level	≥ AL		> PEL	> 4 x PEL	
	1-30 Days	> 30 Days			
<p>1926.62(d) - Exposure Assessment and Interim Protection</p> <p>1926.62(h) - Housekeeping</p> <p>1926.62(i)(5) - Handwashing Facilities</p> <p>1926.62(l)(1)(i) - Hazcom Training</p> <p>(and/or 1926.21 – Safety Training and Education)</p>	<p>1926.62(d)(4) - Monitoring Representative of Exposure for Each Exposed Employee</p> <p>1926.62(j)(1)(i) - Initial Medical Surveillance</p> <p>1926.62(j)(2)(iii) - Follow-up Blood Sampling</p> <p>1926.62(k) - Temporary Removal Due to Elevated Blood Lead</p> <p>1926.62(l)(1)(ii)-(iv) - Information and Training</p>	<p>1926.62(j)(1)(ii) - Medical Surveillance Program</p> <p>1926.62(j)(3) - Medical Exams and Consultation (if required)</p>	<p>1926.62(e) - Engineering and Work Practice Controls</p> <p>1926.62(f) - Respiratory Protection</p> <p>1926.62(g) - Protective Clothing and Equipment</p> <p>1926.62(i) - Hygiene Facilities and Practices</p> <p>1926.62(m) - Signs</p>	<p>1926.62(g)(2) - Clean Protective Clothing Daily</p>	<p>1926.62(f) - Appropriate Respiratory Protection</p> <p>1926.62(g) - Protective Clothing and Equipment</p> <p>1926.62(i)(2) - Change Areas</p> <p>1926.62(i)(5) - Handwashing Facilities</p> <p>1926.62(j)(1)(i) - Biological Monitoring</p> <p>1926.62(l)(1)(i) - Hazcom Training</p> <p>1926.62(l)(2)(iii) - Respirator Training</p> <p>1926.21 - Safety Training and Education</p>


Appendix D

Medical Surveillance Flowchart I

Exposure > AL at Least One Day in 12 Consecutive Months

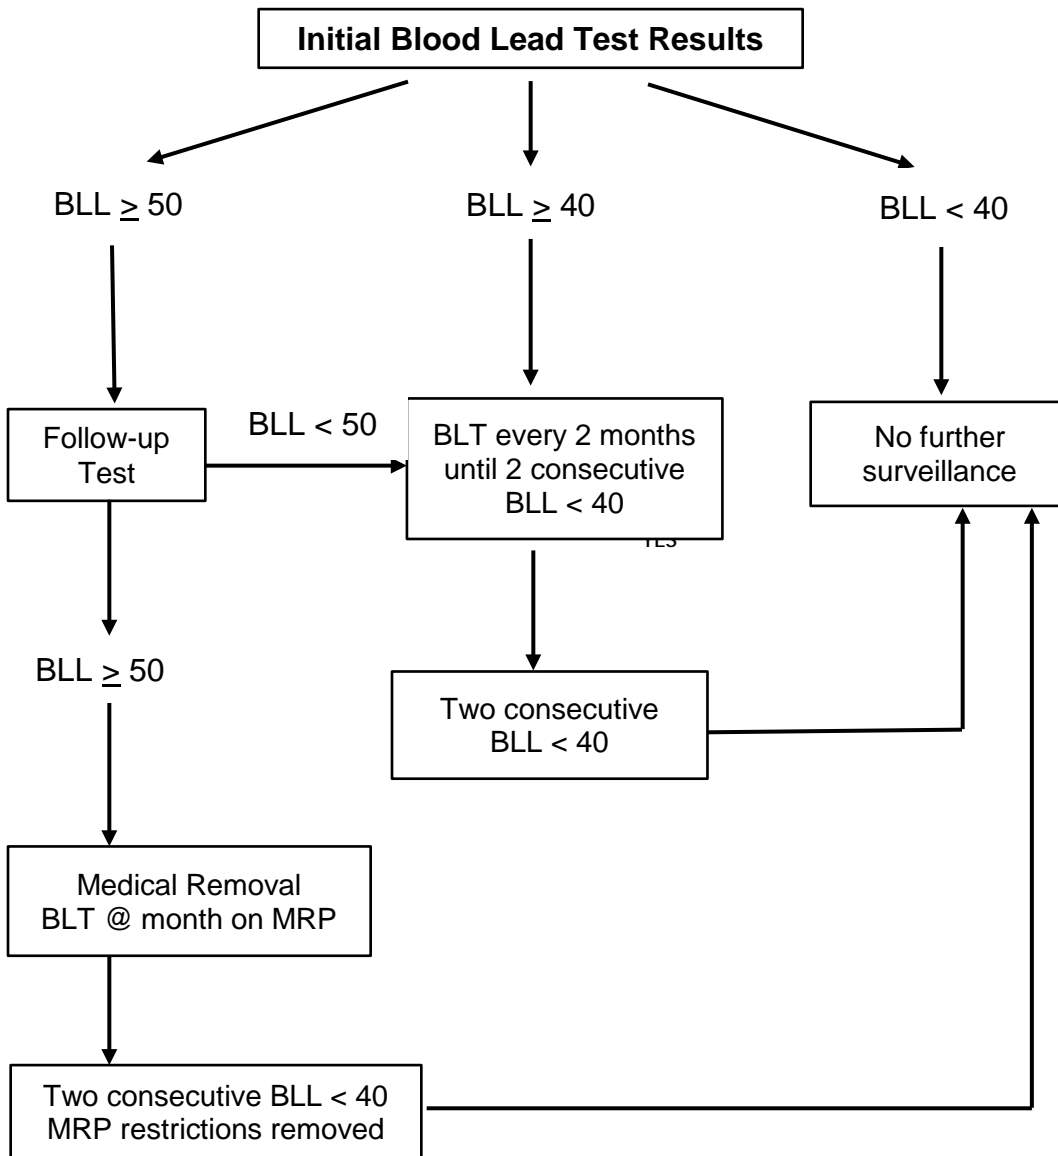

**Exposure > AL More Than 30 Days in 12 Consecutive Months**

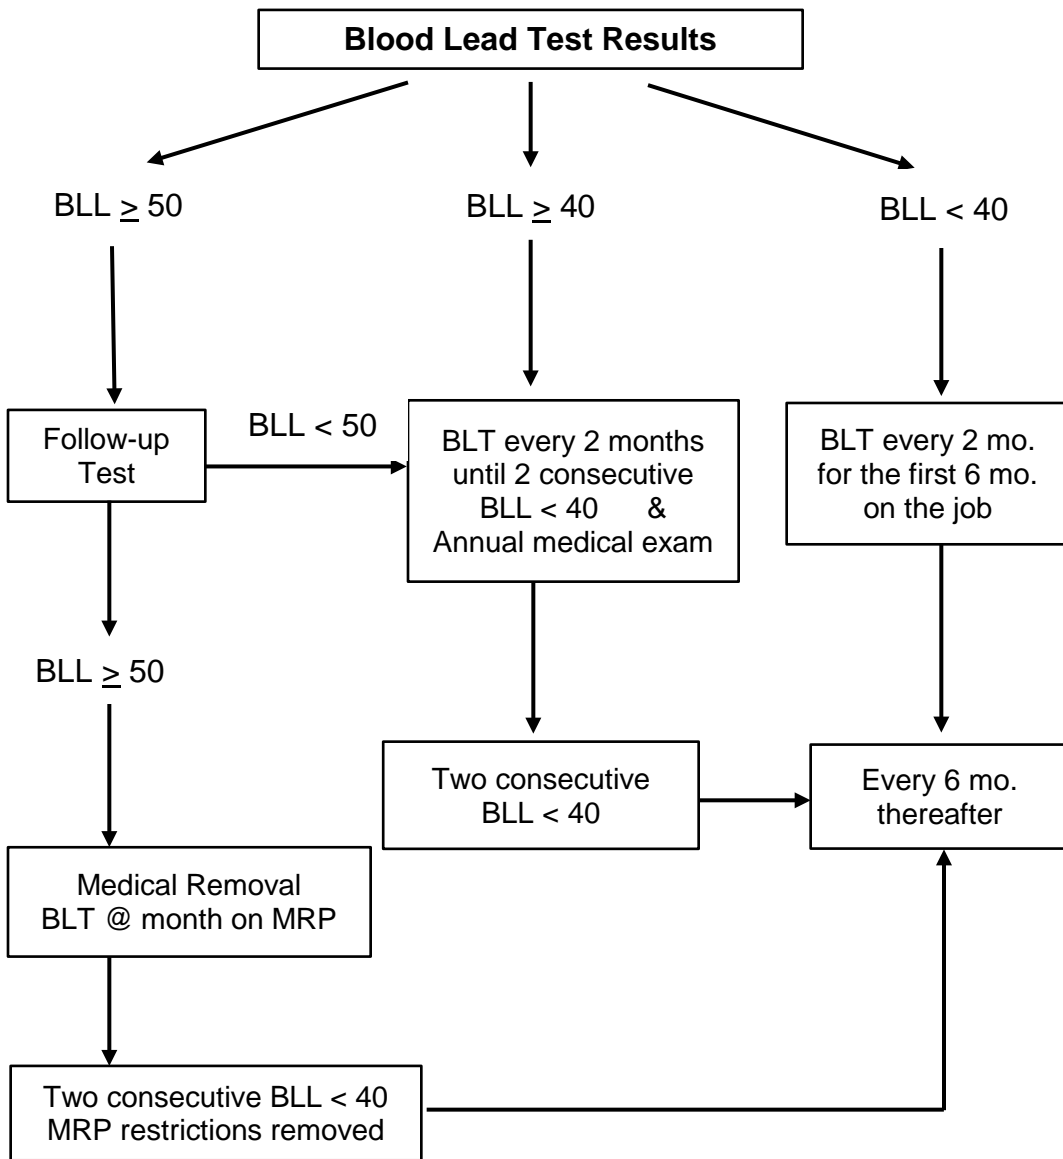

## Appendix E

### Summary and Explanation of the Standard

#### Purpose

The purpose of the interim final rule is to provide a level of protection to workers exposed to lead in construction equivalent to that afforded other lead workers under OSHA's general industry standard 29 CFR 1910.1025. Provisions derived from the general industry standard and incorporated into the interim final standard include the following paragraphs of this rule: (b) Definitions; (c)(1), (2), (3), Permissible exposure limit; (d)(1), (3), (4), (5), (6), (7), (8), Exposure assessment; (e)(2)(i)-(v), (4) Methods of compliance; (f)(1)(i)-(iv), (2), (3), (4), Respiratory protection; (g)(1), (2), Protective work clothing and equipment; (h)(1), (2), (3), (4), Housekeeping; (i)(1), (2), Hygiene facilities and practices; (j)(1)(ii)-(iv), (2)(i)(B)-(C), (ii)-(iv), (3), (4), Medical surveillance; (k)(1)(ii)-(v), (2), Medical removal protection; (l)(1)(ii)(iii), (2), (3), Information and training; (m)(1), (2), Signs; (n)(1), (2), (3), (5), (6), Recordkeeping; and (o)(1), (2), Observation of monitoring.

#### (a) Scope and Application

The interim final lead standard for the construction industry applies to all occupational exposure to lead in all construction work in which lead, in any amount, is present in an occupationally related context.

Construction work is defined as work involving construction, alteration and/or repair including painting and decorating.

#### (b) Definitions

**Action Level** means an airborne concentration of lead of  $30 \mu\text{g}/\text{m}^3$  of air calculated as an 8-hour time weighted average. Action levels are important because their use permits employers to concentrate their resources on those employees and workplace conditions with the potential for high lead exposures.

**Competent Person** means a person who is capable of identifying hazards and has authorization to take corrective measures to eliminate them. Compliance programs required to be developed by employers under paragraph (e) of this section must provide for inspections of job sites, materials, and equipment to be made by the "competent person" to achieve the duties of the competent person set forth in the definition.

**(c) Permissible Exposure Limit**

The employer is required to assure that no employee is exposed to lead at concentrations in excess of the PEL of fifty micrograms of lead per cubic meter of air ( $50 \mu\text{g}/\text{m}^3$ ). [(c)(1)] The PEL is an eight-hour average of exposure for any work day. If respiratory protection is permissibly being used to comply with this limit, the employee needs to wear the respirator only for a period of time that, when averaged with periods of time the respirator is not used, will result in a TWA exposure to or below the PEL. [(c)(3)]

The interim final standard contains a formula by which adjustments to the permissible exposure limit can be made in the case of overtime. For example, if an employee is exposed to lead for 10 hours, the permissible limit as a 10 hour average, would be  $400/10$  or  $40 \mu\text{g}/\text{m}^3$ . [(c)(2)]

**(d) Exposure Assessment**

Each employer who has a workplace or work operation covered by this standard is required to determine if any employee may be exposed to lead at or above the action level of  $30 \mu\text{g}/\text{m}^3$  as an 8-hour TWA. [(d)(2)(i)]

If objective data, demonstrating that under any expected conditions of use a particular product or material containing lead or a specific process, operation or activity involving lead cannot result in employee exposure to lead at or above the action level during processing, use, or handling, are being relied upon by the

employer in lieu of implementing initial monitoring, the employer must establish and maintain a record documenting the nature and relevancy of the objective data. [(d)(3)(iv)] Certain specific tasks, the high exposure or "trigger tasks," are treated differently, however.

Where historical measurements of airborne lead are being used to satisfy the initial exposure assessment requirement, such monitoring data must have been obtained from projects conducted by the employer within the past 12 months under conditions which, in all relevant and significant respects, are essentially the same as the current project. [(d)(3)(iii)]

The initial monitoring requirement only requires monitoring of a representative sample of the employees believed to have the highest exposure levels. [(d)(3)(ii)] If any employee is determined by the initial monitoring to be at or above the action level, then full-scale representative monitoring for all exposed employees is required as set-forth in paragraph (d)(4) of this section. [(d)(4)(i)]

All exposure monitoring performed pursuant to this section must consist of personal breathing zone samples (see OSHA Instruction CPL 2-2.20B, CH-1, Nov. 13, 1990, Directorate of Technical Support) which are representative of the monitored employee's regular, daily exposure to lead over a full shift and which must consist of at least one sample for each job classification in each work area either for each shift or for the shift with the highest exposure level. [(d)(1)(iii)]

The purposes served by air sampling for employee exposure include: determination of the extent of exposure at the worksite, prevention of employee overexposure, identification of the sources of exposure to lead, collection of exposure data so that the employer can select the proper control methods to be used, and evaluation of the effectiveness of selected controls. Monitoring further enables employers to notify employees of their exposure levels, as required by section 8 (c)(3) of the Act.

The results of initial and periodic monitoring determine whether subsequent monitoring is necessary. Monitoring also determines whether other protective provisions of the standard need to be implemented.

If the initial determination or subsequent determination reveals employee exposure to be at or above the action level, but at or below the PEL, the employer is required to perform monitoring at least every 6 months. [(d)(6)(ii)] If the initial determination reveals that employee exposure is above the PEL, the employer must perform monitoring at least quarterly. [(d)(6)(iii)]

Within 5 working days after completion of the exposure assessment, the employer is required to notify each employee in writing of the results which represent that employee's exposure.

[(d)(8)(i)] In addition, whenever the results indicate exposure at or above the PEL, the employer shall include in the written notice a statement that the employee's exposure was at or above that level and a description of the corrective action taken or to be taken to reduce exposure to below that level. [(d)(8)(ii)]

OSHA is aware that in many instances in the construction industry the exposure assessment required under this interim standard will not be completed until after lead operations have begun or even ended. The need for interim protective measures, including provision of respirators, protective clothing and equipment, hygiene facilities, training, and biological monitoring, is presumed for three groups of lead-related tasks/operations (high exposure or "trigger tasks"). [(d)(5)]

The list of high exposure lead-related tasks/operations that have been developed by OSHA are based on available exposure data provided by a firm contracted to perform an assessment of lead exposure levels encountered in the construction industry, and on recommendations of both the Society for Occupational and Environmental Health (SOEH) and the Lead Workgroup of the Department of Labor Advisory Committee on Construction Safety and Health (ACCSH). The tasks are grouped by the presumed degree of overexposure to lead and, therefore, are differentiated by the type of respirator to be provided. One group of tasks/operations presumes employee exposures above the PEL, but not so high as to require the employer to provide the employee with more than the least

protective, allowable respirator (e.g., a respirator with a protection factor of 10). [(d)(2)(i)] The second task group presumes employee exposure above  $500 \mu\text{g}/\text{m}^3$  and requires the employer to provide the employee with a respirator with a protection factor of at least 25. [(d)(2)(iii)] The third task group presumes very high exposures to lead (in excess of  $2500 \mu\text{g}/\text{m}^3$ ) and, therefore, requires the employer to provide the employee with a respirator permitted by the standard for use during that exposure condition (e.g., a respirator with a protection factor above 50). [(d)(2)(iv)]

The tasks identified as requiring interim worker protection are:

- Group 1: manual scraping and sanding  
manual demolition of structures  
heat-gun applications  
power tool with dust collection systems  
spray painting with lead-based paint
- Group 2: lead burning  
using lead-containing mortar  
power tool cleaning without dust collection systems  
rivet busting  
cleanup activities where dry expendable abrasives are used  
movement and removal of abrasive blasting enclosures
- Group 3: abrasive blasting  
welding, cutting and burning on steel structures

### **(e) Methods of Compliance**

The interim final standard requires employers to institute engineering and work practice controls to the extent feasible to reduce exposures to or below the PEL. OSHA thus continues to maintain its preference for engineering and work practice controls. [(e)(2)]

The standard has a requirement for the development and implementation of a written compliance plan prior to the commencement of the job where employee



exposure to lead, without respect to respiratory protection, will be in excess of the PEL [(e)(2)(i)] These written plans must be furnished upon request for examination and copying to affected employees and their designated representatives and to representatives of the Assistant Secretary and the Director. [(e)(2)(iv)] The plans must be reviewed and updated periodically at least every 6 months. [(e)(2)(v)]

When administrative controls are used to lower employee exposure, a rotation schedule is to be kept and followed and made a part of the written compliance plan. [(e)(4)]

### **(f) Respiratory Protection**

The interim final standard requires that respirators be used whenever the concentration of lead is at or above the PEL, in work situations where engineering and work practice controls are not sufficient to reduce exposures to or below the PEL, or whenever an employee requests a respirator. Also, as stated under paragraph (d) above, respirators must be used when performing certain listed high exposure or "trigger tasks" prior to the completion of the initial assessment. [(f)(1)(i)-(iv)]

OSHA has required employers to provide powered, air purifying (positive pressure) respirators (PAPR) to employees who request one, so long as they will provide adequate protection against the hazard for which a respirator is worn. [(f)(2)(ii)] This requirement is intended as an incentive to employee respirator use by minimizing the discomfort associated with long-term negative pressure respirators.

Respirators must be provided at no cost to the employee. [(f)(1)] Selection of respirators must be from Table 1 of the interim final standard; however, the employer may always select a respirator providing greater protection than is required by the standard. [(f)(2)(i)] All respirators must be approved by MSHA or NIOSH. [(f)(2)(iii)]

The employer is also required to assure that the respirator facepieces fit properly and exhibit minimum facepiece leakage. [(f)(3)(i)] Employers are required to perform either quantitative or qualitative face fit tests at the time of initial fitting and at least every six months thereafter for each employee wearing negative pressure respirators. The qualitative fit tests may be used only for testing the fit of half-mask respirators where they are permitted to be worn, and must be conducted in accordance with Appendix D. [(f)(3)(ii)]

### **(g) Protective Clothing and Equipment**

The employer is required to provide, at no cost to employees, protective clothing and equipment that are appropriate for the hazard. Such clothing and equipment is necessary in order to protect employees from lead compounds which may cause skin or eye irritation (e.g., lead arsenate, lead azide). For employees who are exposed to lead above the PEL, employer-provided clothing assures that clothing, shoes, and equipment on which lead dust can accumulate during the work shift are not worn home. Protective clothing and equipment must also be provided to employees performing high exposure "trigger tasks" during initial exposure assessment. [(g)(2)]

Clean work clothing is required to be provided at least weekly to employees whose exposure levels are above the PEL and daily when exposure is above  $200 \mu\text{g}/\text{m}^3$  as an 8-hour TWA. [(g)(2)(i)] The employer is required to provide for the cleaning, laundering, or disposal of protective clothing and equipment and must repair or replace required protective clothing and equipment as needed to maintain effectiveness. [(g)(2)(ii)-(iii)] The employer must assure that all protective clothing is removed at the completion of a work shift. [(g)(2)(iv)]

### **(h) Housekeeping**

OSHA's view is that as rigorous a housekeeping program as practicable is necessary in many jobs to keep airborne lead levels below permissible limits. This

requires a regular housekeeping schedule adapted to exposure conditions at a particular site. [(h)(1)] Vacuuming is considered to be the most reliable method of cleaning surfaces on which dust accumulates, but equally effective methods may be used, such as wet floor scrubbers, for example. [(h)(2)] Where vacuuming methods are selected, the vacuums must be equipped with HEPA filters. [(h)(4)] Blowing with compressed air is generally prohibited as a cleaning method. [(h)(5)]

### **(i) Hygiene Facilities**

The employer must provide adequate shower facilities, if feasible; clean areas for changing clothes; and eating areas for employees who have exposure above the PEL. [(i)(2)-(4)] Change areas must be provided for employees performing high exposure "trigger tasks" during initial exposure assessment. [(i)(2)] Handwashing facilities are to be provided for all employees occupationally exposed to lead in accordance with 29 CFR 1926.51(f). [(i)(5)(i)]

Employers must assure that employees use the facilities as required by the standard as well as observe prohibitions on the use of tobacco, food, and cosmetics in contaminated areas. Separate storage facilities in change areas for street and work clothing, to prevent cross-contamination between the two, must be provided. [(i)(2)(ii)] Employers must assure that employees exposed to lead during their work shift shower before leaving the workplace, where showers are provided, and do not leave wearing protective work clothing or equipment. [(i)(3)(ii); (i)(2)(iii)]

### **(j) Medical Surveillance**

The medical surveillance provisions are part of this standard's comprehensive approach to prevention of lead-related disease. Its purpose is to supplement the standard's primary mechanisms of disease prevention, the elimination or reduction of airborne concentrations of lead and sources of ingestion, by facilitating the early detection of medical effects associated with exposure to lead.

All medical examinations and procedures are to be performed by or under the supervision of a licensed physician and are to be provided without cost to employees at a reasonable time and place. [(j)(1)(iii)-(iv)]

The medical surveillance provisions contemplate two phases of medical surveillance; one is initial medical surveillance, the other is a medical surveillance program. [(j)(1)(i)-(ii)] Initial medical surveillance consists of biological monitoring in the form of blood sampling and analysis for lead and zinc protoporphyrin levels. It is required to be provided to employees occupationally exposed to airborne concentrations of lead on any one day at or above the action level as well as to employees performing high exposure "trigger tasks" during initial exposure assessment. [(j)(1)(i); (d)(2)(v)]

If an employee's airborne lead exposure is at or above the action level for more than 30 days a year, the employer shall provide a medical surveillance program to the employee consisting of routine monitoring of an employee's blood lead and ZPP levels. [(j)(2)(ii)] If a routine and follow-up blood test for blood lead exceed the removal criteria of 50 µg/dl, then the employee must be removed from exposure to airborne lead that exceeds the action level. [(k)(1)(i)] Employees must be notified by the employer in writing of their blood lead levels within five working days after the receipt of biological monitoring results. [(j)(2)(iv)]

The employer's obligation to provide a full medical surveillance program to an employee, including annual medical exams, is triggered by a determination that the employee's blood lead level exceeds 40 µg/dl if the employee's airborne exposure is or may be at or above the action level for more than 30 days a year.

The required examination includes a work history and medical history; a physical examination; blood pressure measurement; determinations of blood lead level (PbB), hematocrit, hemoglobin, peripheral smear morphology and red cell indices; levels of zinc protoporphyrin (ZPP), routine urinalysis (specific gravity, sugar, protein determinations, and microscopic examination), blood urea nitrogen (BUN), and serum creatinine (S-Creat). [(j)(3)(ii)(A)-(E)]

Medical consultations are required to be provided upon notification by an employee (1) that the employee has developed symptoms commonly associated with lead-related disease, (2) that the employee desires advice concerning the effects of lead on reproductive capacity, or is pregnant, and (3) that the employee has demonstrated difficulty in breathing during fit testing or use of a respirator. [(j)(3)(i)(B)] The content and frequency of these examinations is to be at the discretion of the physician. Upon request of an employee, a pregnancy test or male fertility test must be provided. [(j)(3)(ii)]

The medical surveillance provisions of the final standard contain a multiple physician review mechanism which gives workers an opportunity to obtain a second and possibly third opinion regarding the medical determinations made pursuant to the standard. An employee may designate a second physician to review any findings, determinations or recommendations of an initial physician chosen by the employer. [(j)(3)(iii)(A)] Efforts are to be made to resolve any disagreement which may arise between the two physicians. [(j)(3)(iii)(C)] Should they be unable to agree, a third physician they jointly select will resolve the disagreement. [(j)(3)(iii)(D)] It is expected that the third physician will consult with the two prior physicians, and upon request, the employer must supply the same information to the third physician given to the initial physicians. [(j)(3)(iii)(D)(i); (j)(iv)]

OSHA's reasons for the provision of this review process are twofold: first, to broaden and strengthen the basis for medical determinations in situations where a worker questions the results of the initial examination or consultation provided by the employer; and second, to assure employee confidence in the soundness of medical determinations made pursuant to the standard. Employers must bear the expense of the multiple physician review mechanism where it is used. The standard contains no more limitation upon an employee's choice of a second physician than it places on an employer's choice of the initial physician.

The interim final standard prohibits prophylactic chelation of any employee because chelation can be a potentially harmful treatment. [(j)(4)(i)]

### **(k) Medical Removal Protection**

The employer is required to remove an employee from work having an exposure to lead at or above the action level on each occasion that a periodic and a follow-up blood sampling test indicate that the employee's blood lead level is at or above 50 µg/dl. [(k)(1)(i)] The employer must also remove an employee from work having an exposure to lead at or above the action level on each occasion that a final medical determination results in a medical finding, determination, or opinion that the employee has a detected medical condition which places the employee at increased risk of material impairment to health from exposure to lead.

For an employee removed from exposure to lead at or above the action level due to a blood lead level at or above 50 µg/dl the employer may return that employee to former job status when two consecutive blood sampling tests indicate that the employee's blood level is at or below 40 µg/dl. [(k)(1)(iii)(A)(1)] For an employee removed from exposure to lead due to a final medical determination, the employee must be returned when a subsequent final medical determination results in a medical finding, determination, or opinion that the employee no longer has a detected medical condition which places the employee at increased risk of material impairment of health from exposure to lead. [(k)(1)(iii)(A)(2)]

The requirement that an employer return an employee to his or her former job status is not intended to expand upon or restrict any rights an employee has or would have had, absent temporary medical removal, to a specific job classification or position under the terms of a collective bargaining agreement. [(k)(1)(iii)(B)]

If a removed employee files a claim for workers' compensation payments for a lead-related disability, then the employer must continue to provide medical removal protection benefits pending disposition of the claim. [(k)(2)(iv)]

Where an employer, although not required by this section to do so, removes an employee from exposure to lead or otherwise places limitations on an employee

due to the effects of lead exposure on the employee's medical condition, the employee is entitled to full medical removal protection benefits. [(k)(2)(vi)]

Medical removal protection benefits continue for up to eighteen (18) months or as long as the job the employee was removed from continues, whichever comes first. [(k)(2)(i)-(ii)]

### **(l) Employee Information and Training**

The interim final standard requires the employer to provide an information and training program for all employees exposed to lead at or above the action level or are subject to exposure to lead compounds which may cause skin or eye irritation (e.g. lead arsenate, lead oxide). [(l)(i)(ii)] The employee must be apprised of the specific hazards associated with his work environment, protective measures which can be taken, and his rights under the standard. [(l)(2)]

Training must include the following:

- (1) the content of the standard and its appendices
- (2) the specific nature of the operations which could result in exposure to lead above the action level
- (3) the purpose, proper selection, fitting, use, and limitation of respirators
- (4) the purpose and a description of the medical surveillance program, and the medical removal protection program
- (5) the engineering controls and work practices associated with the employee's job assignment, including training of employees to follow relevant good work practices described in Appendix B of this section
- (6) the contents of any compliance plan in effect
- (7) instructions to employees that chelating agents should not be routinely used to remove lead from their bodies
- (8) the employee's right of access to records under 29 CFR 1910.20. [(l)(2)(i)-(viii)]

The employer is required to make available to all affected employees a copy of this standard and its appendices. [(1)(3)]

### **(m) Signs**

Sign posting, as well as periodic training, is needed to adequately inform employees of the presence of high levels of lead and the possible need to utilize respirators and other protective equipment. Signs are to be illuminated and cleaned as necessary. { [(m)(1)(2)(iii)]

~~Phrases to be placed on the sign include “Warning”, “Lead Work Area”, “Poison”, and “No Smoking or Eating.” [(m)(2)(i)]~~

The employer shall post the following warning signs in each work area where an employee's exposure to lead is above the PEL [(m)(1)(i)]: DANGER, LEAD WORK AREA, MAY DAMAGE FERTILITY OR THE UNBORN CHILD, CAUSES DAMAGE TO THE CENTRAL NERVOUS SYSTEM. and DO NOT EAT, DRINK OR SMOKE IN THIS AREA

Prior to June 1, 2016, employers may use the following legend in lieu of that specified in paragraph (m)(1)(i) of this section [(m)(1)(v)]: WARNING, LEAD WORK AREA, POISON, and NO SMOKING OR EATING. }

### **(n) Recordkeeping**

The interim final standard requires records of all exposure monitoring, and other data used in conducting the employee exposure assessment, including objective data, to be established and maintained. [(n)(1); (n)(4)] The records must include the name and job classification of employees monitored, details of the sampling and analytic techniques, results, and type of respiratory protection worn. [(n)(1)(ii)] These records must be kept for 30 years. [(n)(1)(iii); (n)(4)(ii)]

The standard also requires employers to establish and maintain records of medical surveillance (biological monitoring and medical examination results). [(n)(2)(i)] These records must include the names of employees, the physician's written opinion, exposure data provided to the physician and any employee medical complaints associated with lead exposure. [(n)(2)(ii)] In addition, the employer is required to keep, or must assure that the examining physician keeps, a record of the results of medical examinations, a description of laboratory procedures and a copy of the results of biological monitoring. [(n)(2)(iii)] These records must be kept for at least the duration of employment plus 30 years, except that medical records of employees who have worked for less than one (1)



year for the employer need not be retained beyond the term of employment if they are provided to the employee upon termination of employment. [(n)(2)(iv)]

The employer must establish and maintain an accurate record for each employee removed from current exposure to lead. The record is to contain four entries each time an employee is removed: the employee's name and social security number; the dates of removal and return; a brief explanation of how each removal was or is being accomplished; and whether or not the reason for the removal was an elevated blood lead level. [(n)(3)(i)-(ii)] Medical removal records are to be maintained for at least the duration of employment. [(n)(3)(iii)]

Records are to be transferred to a successor employer whenever the employer ceases to do business. [(n)(6)(i)]

#### **(o) Observation of Monitoring**

The interim final standard requires that employers provide employees or their representatives with the opportunity to observe monitoring of employee exposures to lead. [(o)(1)] Observers are entitled to an explanation of the measurement procedure, to observe all steps related to the measurement procedure, and to record the results obtained. [(o)(2)(ii)]

#### **(p) Effective Date**

The effective date of the interim final standard is June 3, 1993.

#### **(q) Appendices**

The appendices are intended to be purely informational and, unless otherwise expressly stated in this section, are not intended to create any additional obligations. Appendix D provides mandatory procedures for fit testing of respirators.

**(r) Startup Dates**

All requirements of the interim final rule, except for engineering controls specified in paragraph (e)(1) of the standard, must be complied with as soon as possible, but no later than 60 days from the effective date of this section (by August 2, 1993). [(r)(2)] Feasible engineering controls specified under paragraph (e)(1) shall also be implemented as soon as possible, but no later than 120 days from the effective date of this section (by October 1, 1993). [(r)(2)]